




Parallel boxes

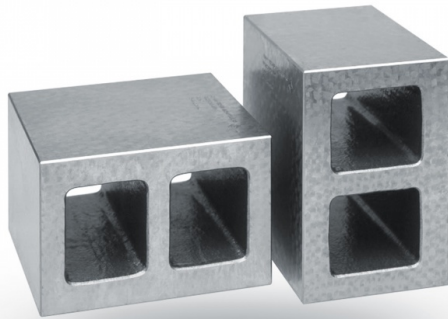

Specification

Made of special cast-iron. Worked in pairs.

- › Design A: Without clamping slot. Without T-slot.
- › Design B: With clamping slot (not pictured).
- › Design C: With T-slots to DIN 650 (not pictured).

Working

› 4-sides precise. The 4 longitudinal faces are worked in pairs, flat, parallel and rectangular to each other according to the indicated precision grades. The front faces are dressed.

› 6-sides precise. All faces are worked in pairs, flat, parallel and rectangular to each other according to the indicated precision grades.

JFA precision grade III

- › Accuracy 0,040 mm, dressed and egalized.
- › Design A, 4-sides precise, order-no. 620012. 6-sides precise, order no. 620212.
- › Design B, 4-sides precise, order-no. 621012. 6-sides precise, order no. 621212.
- › Design C, 4-sides precise, order-no. 622012. 6-sides precise, order no. 622212.

JFA precision grade I

- › Accuracy 0,010 mm, finely scrapped and touched.
- › Design A, 4-sides precise, order-no. 620015. 6-sides precise, order no. 620215.
- › Design B, 4-sides precise, order-no. 621016. 6-sides precise, order no. 621216.
- › Design C, 4-sides precise, order-no. 622016. 6-sides precise, order no. 622216.

JFA precision grade I++

- › Accuracy 0,002 mm, scrapped and touched in finest execution.
- › Design A, 4-sides precise, order-no. 620017. 6-sides precise, order no. 620217.
- › Design B, 4-sides precise, order-no. 621017. 6-sides precise, order no. 621217.
- › Design C, 4-sides precise, order-no. 622017. 6-sides precise, order no. 622217.

On demand: other dimenisons, parallel boxes due to size and single pieces.

TECHNICAL TABLE

length	mm	100	150	225	300	400	500	600	600
cross-section	mm	100x75	150x100	150x100	225x150	300x200	300x150	300x150	400x200
design A/ weight per pair	kg	6	20	30	75	140	160	210	260
order-no.	620012 - 620217	01	02	03	04	06	07	08	09
design B / weight per pair	kg	6	18	26	70	130	150	190	240
order-no.	621012 - 621217	01	02	03	04	06	07	08	09
design C / weight per pair	kg	8	24	18	88	152	206	242	392
number of t-slots	›	4	4	4	6	10	8	8	10
nominal width of t-slots	›	12	12	12	14	14	14	14	14
order-no.	622012 - 622217	01	02	03	04	06	07	08	09

